



MEACO  
PLATINUM  
RANGE

# Meaco WALL ULTRA QUIET WALL MOUNTED DEHUMIDIFIERS



MeacoWall One | MeacoWall Two | MeacoWall Three



# MeacoWALL ULTRA QUIET WALL MOUNTED DEHUMIDIFIERS



- ✓ Swimming pools
- ✓ Gyms
- ✓ Spa areas
- ✓ Storage applications
- ✓ Museums and archives
- ✓ Industry
- ✓ Pump rooms
- ✓ Anywhere that needs a wall mounted dehumidifier

Introducing Meaco's new range of high capacity wall mounting dehumidifiers that combine a very modern styling with advanced dehumidification design.

### Ultra Quiet

The incorporation of a DC fan motor helps to reduce running costs and keeps noise levels very low at just 44dB for the MeacoWall One and 46dB for the MeacoWall Two.

### Energy Efficient

These energy efficient heat pump compressor dehumidifiers deliver all energy used in the drying process back to the space thus delivering dry, warm air to your room whilst keeping energy costs down.

### Glass Finish

These great looking dehumidifiers come in a white casing with either a white or black glass front panel that incorporates the light touch LED controls.

### Slimline

Installation is flexible as well with the option of continuous drainage from either the right or left hand side of the dehumidifier. At a depth of just 220mm deep these dehumidifiers will not protrude far into your room.





All air is filtered when it enters the dehumidifier and the control system allows you to select either continuous airflow for more accurate humidity control or for the fan to stop when the desired relative humidity has been reached.

### Low Temperature Use

The automatic defrosting system allows use right down to 10°C for those unheated applications where humidity control is required. For swimming pool applications the refrigeration coils are specially coated to ensure a long service life.

## SPECIFICATIONS

	One	Two	Three	
Temperature Range	+10°C to +32°C			
Relative Humidity Range	40%rh to 90%rh			
Rated Voltage	220-240V/50Hz			
Air Flow (m³/h)	450m³/h	600m³/h	750m³/h	
Noise Level at 1 Metre dB(A)	44	44	46	
Power Consumption (kW)	0.89	1.09	1.7	
Rated Current (amps)	4.1	5.1	7.9	
Refrigerant	R32			
Drying Capacity in Litres (at 30°C & 80%rh)	per hour	2.3	3.1	3.9
	per day	55	75	95
Drain Diameter	16mm			
Dimensions (mm)(HDW)	650x220x1298	650x220x1496	650x220x1743	
Nett Weight (Kgs)	63	77	82	

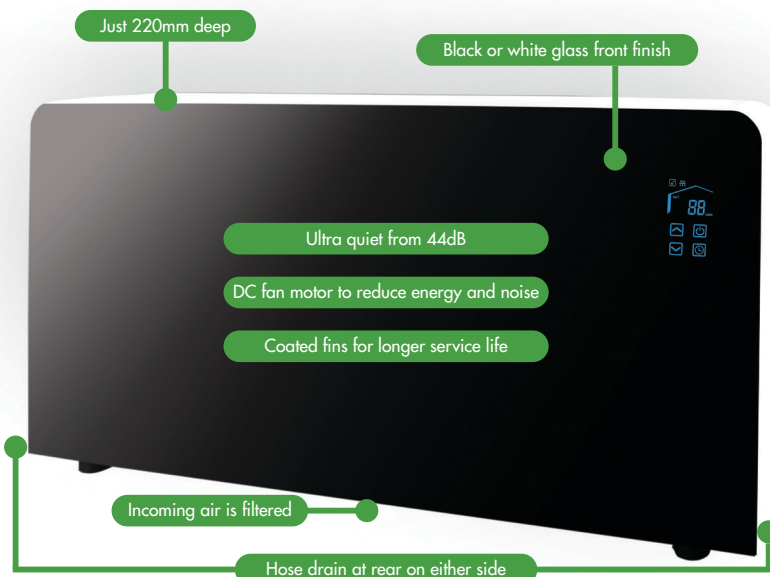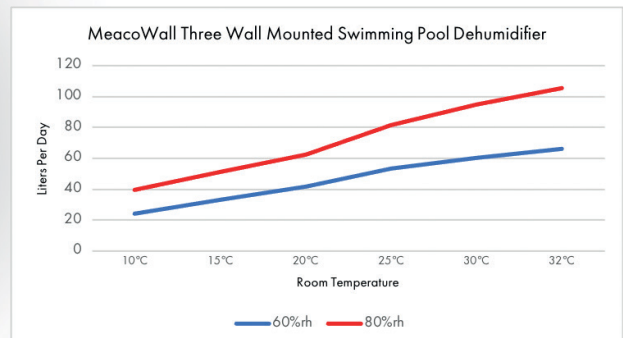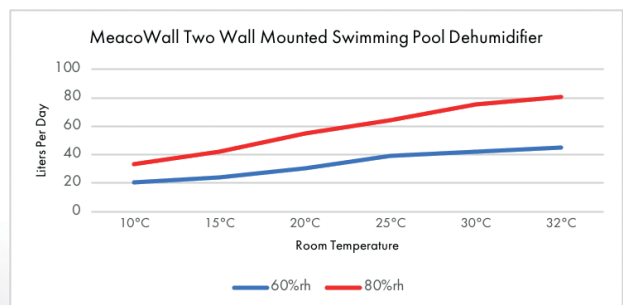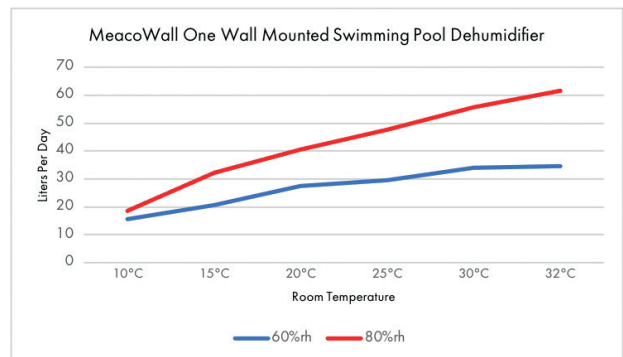

Meaco (U.K.) Limited, Meaco House, Parklands, Railton Road, Guildford, Surrey, GU2 9JX, United Kingdom  
 t : 01483 234900 e : sales@meaco.com  
[www.meaco.com](http://www.meaco.com)